




# T E S T R E P O R T

Test Report Date: Aug.07.2012

	Style	Colour	Finish	Weight (g/m2)	Testing Speed (mm/min)	Tensile Strength (lb) Stripes 2"x12"		Elongation Break (%) Stripes 2"x12"		Tearing Strength (lb) ASTM D-2261		Air Permeability (sec)	Stretch at 10 lbs (%) *			1% (lbs)		
						0°	90°	0°	90°	0°	90°		0°	90°	45°	0°	90°	45°
1	N075C	White	PU2coating	42-43	100	100.00	85.00	22.00	22.80	6.75	8.50	200.0	1.08	1.91	4.76	9.38	6.49	4.36
Lot no. OC02373-101-001A																		

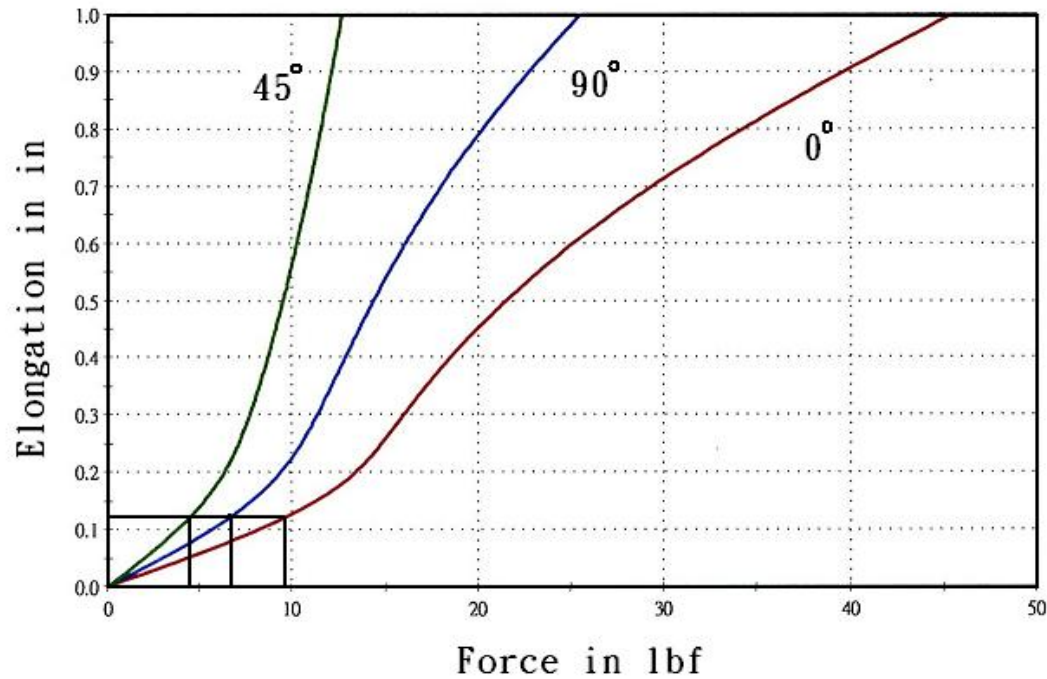

Remark \*

0° :  $1.08/100 \times 12 = 0.1296'' = 12.96$  unit

90° :  $1.91/100 \times 12 = 0.2292'' = 22.9$  unit

45° :  $4.76/100 \times 12 = 0.5712'' = 57$  unit