




T E S T R E P O R T

Test Report Date: Mar.03.2010

	Style	Colour	Finish	Weight (g/m2)	Testing Speed (mm/min)	Tensile Strength (lb) Stripes 2"x12"		Elongation Break (%) Stripes 2"x12"		Tearing Strength (lb) ASTM D-2261		Air Permeability (sec)	Stretch at 10 lbs (%) *			1% (lbs)		
						0°	90°	0°	90°	0°	90°		0°	90°	45°	0°	90°	45°
1	N150C	White	PU1coating	68-70	100	157.00	123.60	38.50	35.00	8.54	7.86	500-550	1.17	2.25	5.00	8.50	5.50	4.50
Lot no. 99020554-01																		

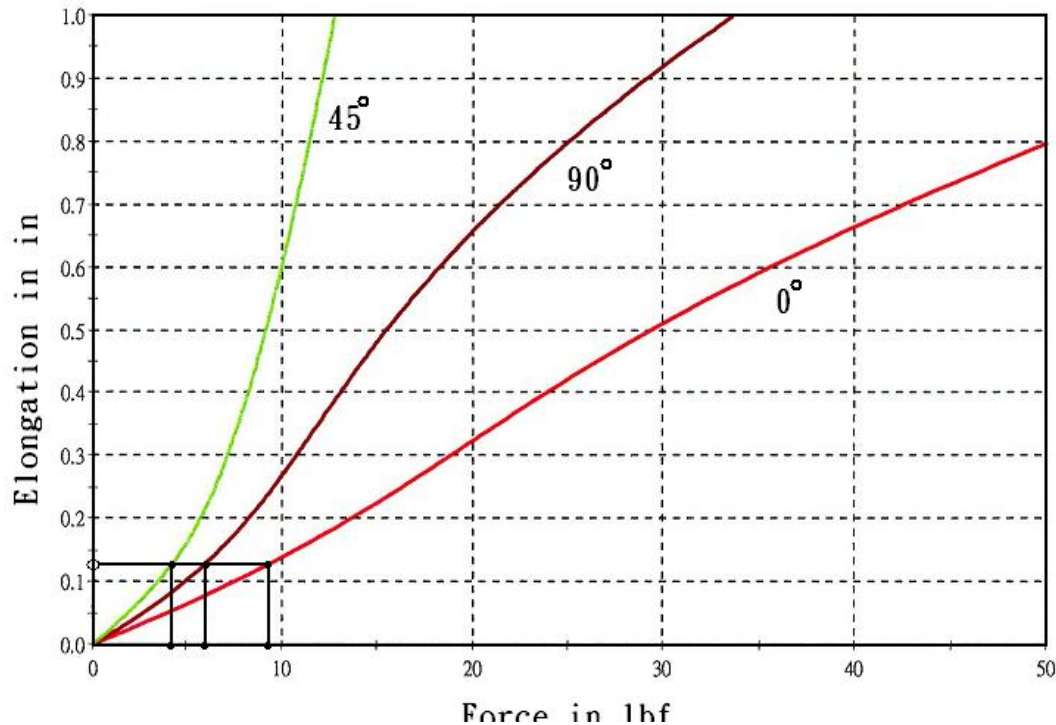

Remark *

0° : $1.17/100 \times 12 = 0.14" = 14$ unit

90° : $2.25/100 \times 12 = 0.27" = 27$ unit

45° : $5.00/100 \times 12 = 0.60" = 60$ unit